

150W Dual Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F615 199 × 98 × 50(mm)

AC input voltage range	170~264VAC (210~370VDC)
Inrush current	cold start, 40A/230V
Input leakage current.....	< 0.7mA/ 230VAC
Line regulation (full load)	$\leq \pm 0.5\%$
Voltage tolerance.....	$V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator); $\leq \pm 10\%$ (without)
Output voltage adjust range	$V_1: \pm 5\%$ of rated output voltage
Output overload protection	105~130%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards.....	design meet GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Efficiency
HF150W-D-L	15V	0.5~5.0A	120mV	85%
	-15V	0.5~5.0A	120mV	

Drawing

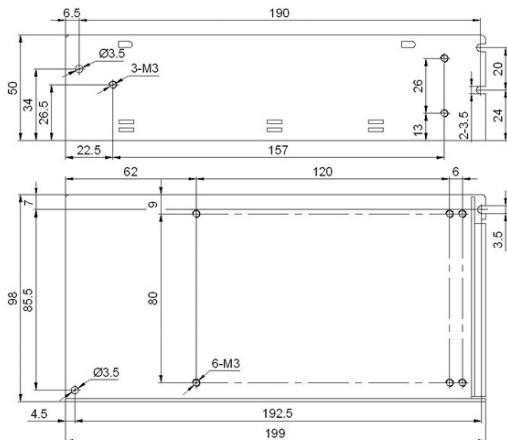

F615